

Saber Spot Go



Light Efficiency:

31 Lumen/Watt

Light Quality:

CRI: 69.9

Color Temperature:

6899 K

Output: 163 lm

Peak: 18202 cd


Power: 5.3 W

PF: 0.42



Beam Angle

4.5°

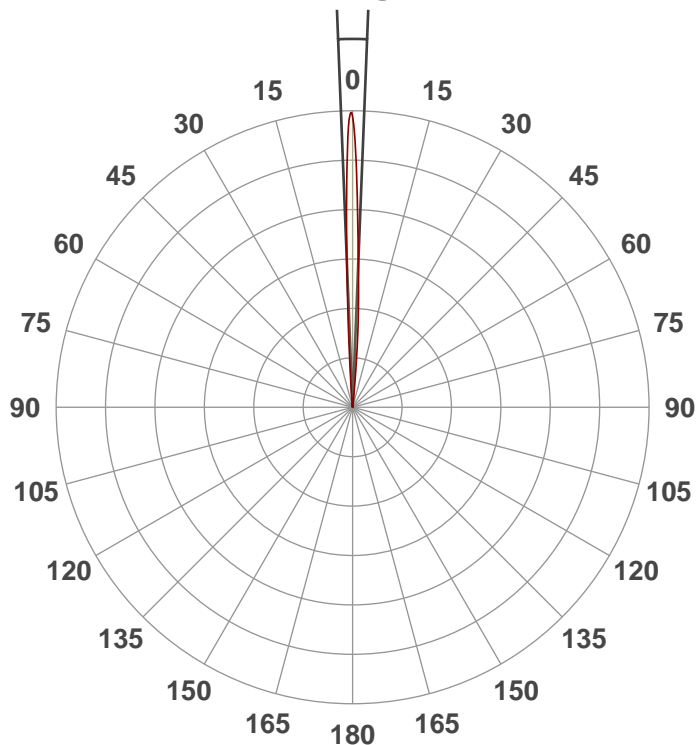


Test:

White

Date:

10/3/2018


Note:




CIE 1931
x: 0.308
y: 0.316

Spectra



Dominant Wavelength: 360nm

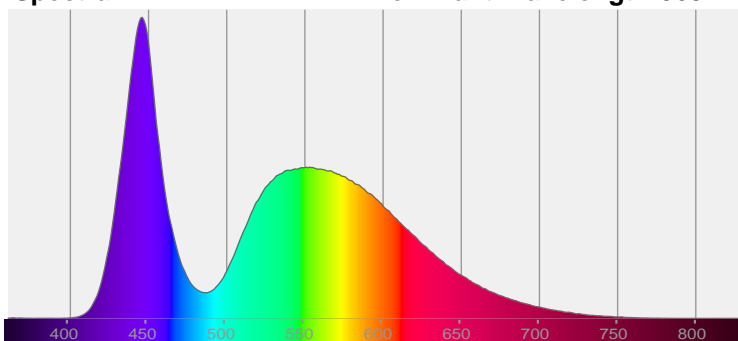


Power

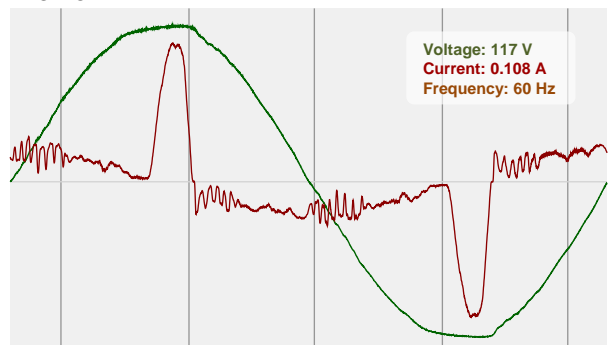


Color Details

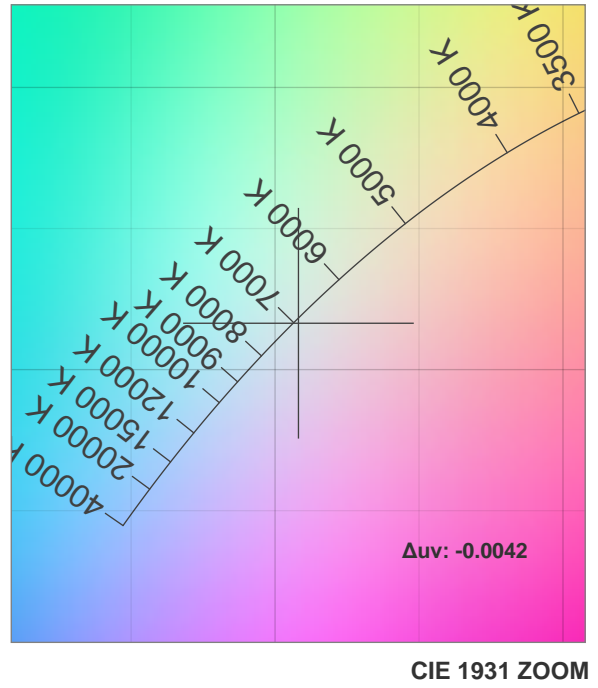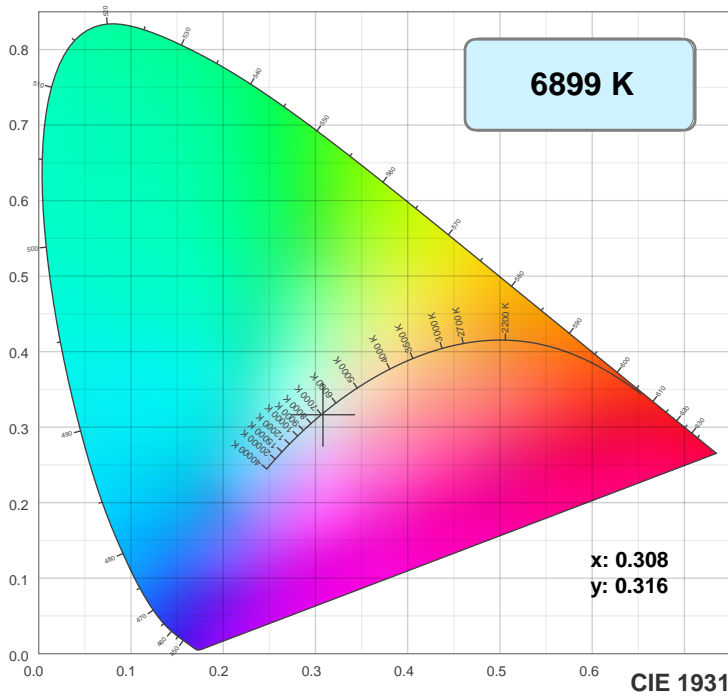

TM30: 65.1

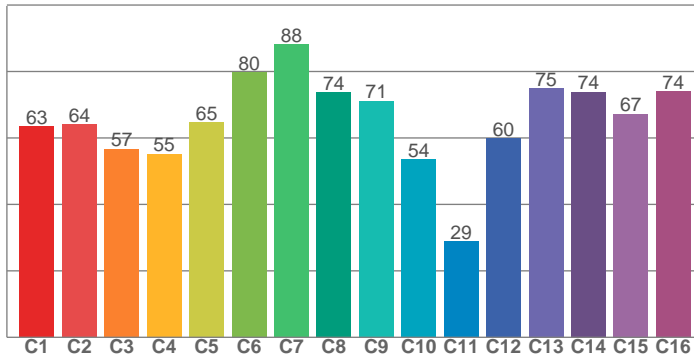

CRI: 69.9 (R1-R8)

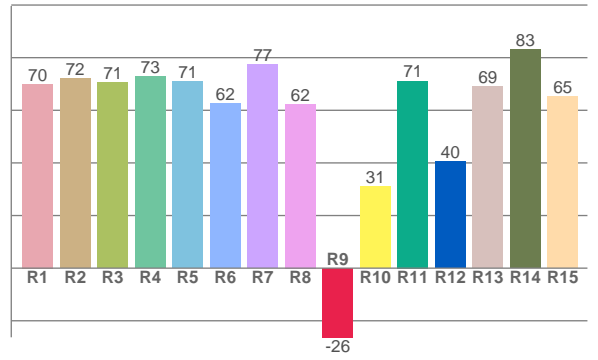

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
70.0	72.2	70.7	72.8	71.0	62.5	77.5	62.4	-26.3	31.2	71.2	40.5	69.1	83.1	65.3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
63.4	64.0	56.7	55.1	64.7	79.8	88.1	73.8	71.2	53.6	28.8	59.8	75.0	73.8	67.3	74.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
81.2	89.8	57.4	50.4	64.7	70.7	76.1	86.9	84.3	65.2	58.6	61.5	66.5	57.2	67.7


CQS: 67.1

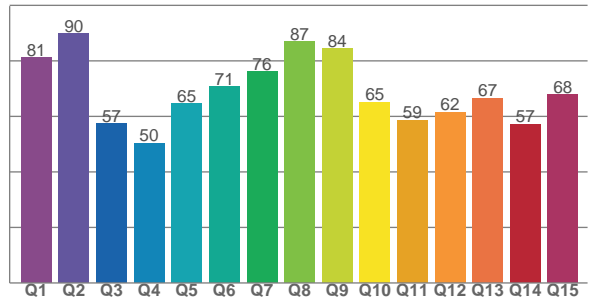

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
6899 K	69.9	-26.3	65.1	94.7	67.1	0.308	0.316	0.199	0.307	-0.0042

Beam Details

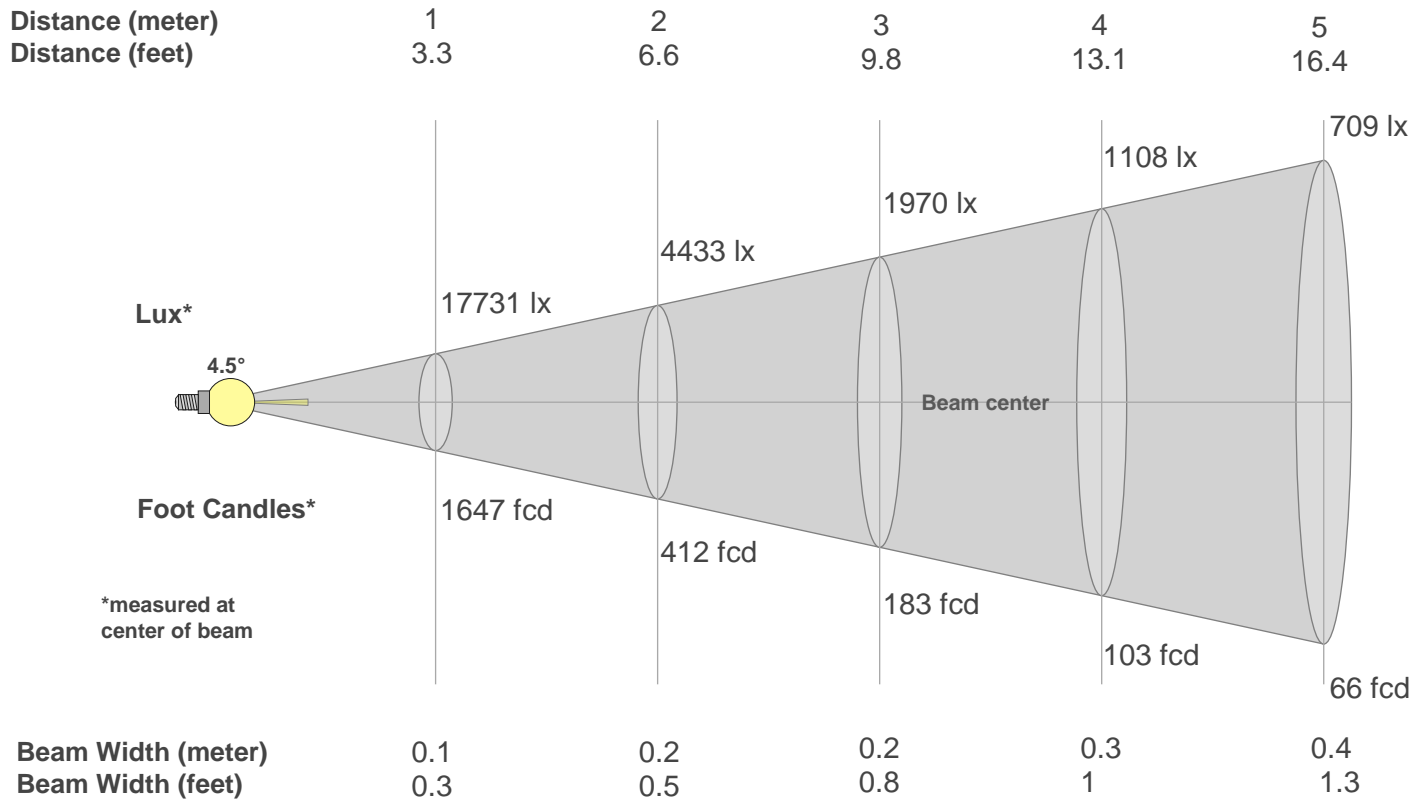

Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	17731	4433	1970	1108	709	493	362	277	219	177	147	123	105	90	79	69	61	55	49	44
fcd	1647.3	411.8	183	103	65.9	45.8	33.6	25.7	20.3	16.5	13.6	11.4	9.7	8.4	7.3	6.4	5.7	5.1	4.6	4.1

Intensities in 0° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
17.7K	16.5K	10.6K	5.1K	1.8K	0.7K	0.4K	0.2K	0.2K	0.1K	0.1K	0.1K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K
100%	93%	60%	29%	10%	4%	2%	1%	1%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 90° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
17.7K	16.5K	10.6K	5.1K	1.8K	0.7K	0.4K	0.2K	0.2K	0.1K	0.1K	0.1K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K
100%	93%	60%	29%	10%	4%	2%	1%	1%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 180° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
17.7K	14.3K	10.0K	7.1K	4.6K	2.2K	0.7K	0.3K	0.2K	0.1K	0.1K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K
100%	81%	56%	40%	26%	12%	4%	2%	1%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Intensities in 270° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
17.7K	14.3K	10.0K	7.1K	4.6K	2.2K	0.7K	0.3K	0.2K	0.1K	0.1K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K	0.0K
100%	81%	56%	40%	26%	12%	4%	2%	1%	1%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
4.5°	9.2°	12.1°	100.0%	100.0%