

Encore FR Pro Color



Light Efficiency:



Light Quality:



Color Temperature:



Output: 5128 lm

Peak: 91151 cd


Power: 343 W

PF: 1.0



Beam Angle

12°

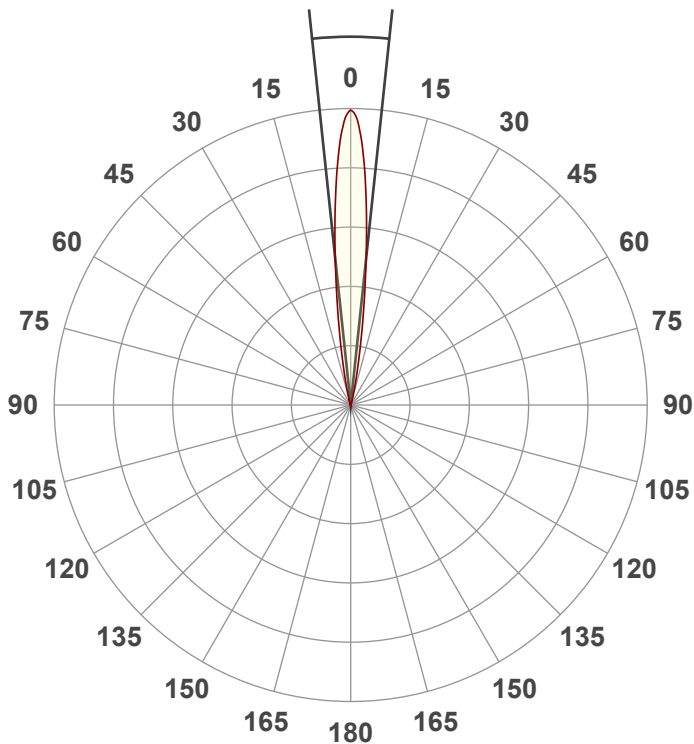

Test:


6200K Zoom 50%

Date:

3/17/2022

Note:


CT Value @ 191



CIE 1931
x: 0.317
y: 0.337

Spectra



Dominant Wavelength: 569nm

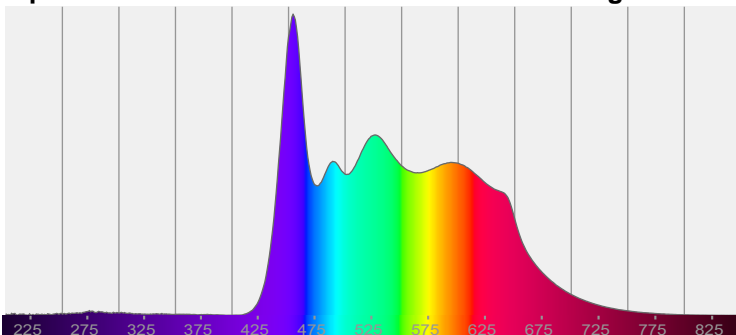


Power

Voltage: 119 V
Current: 2.88 A
Frequency: 0 Hz


Color Details

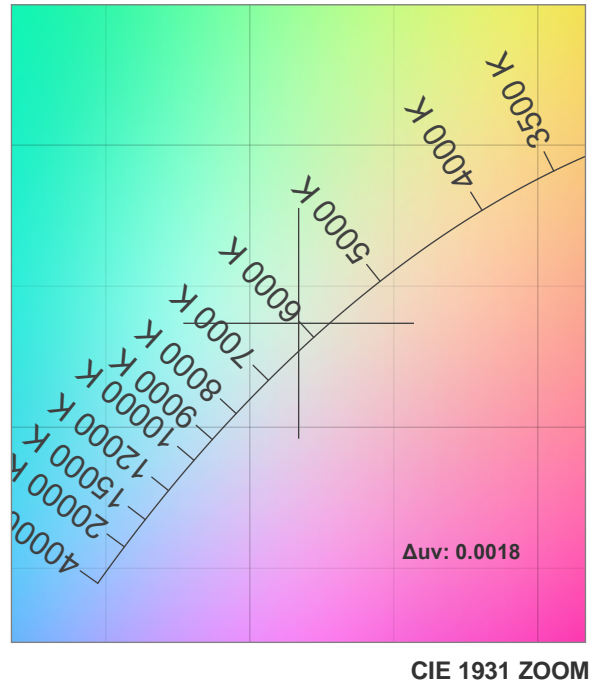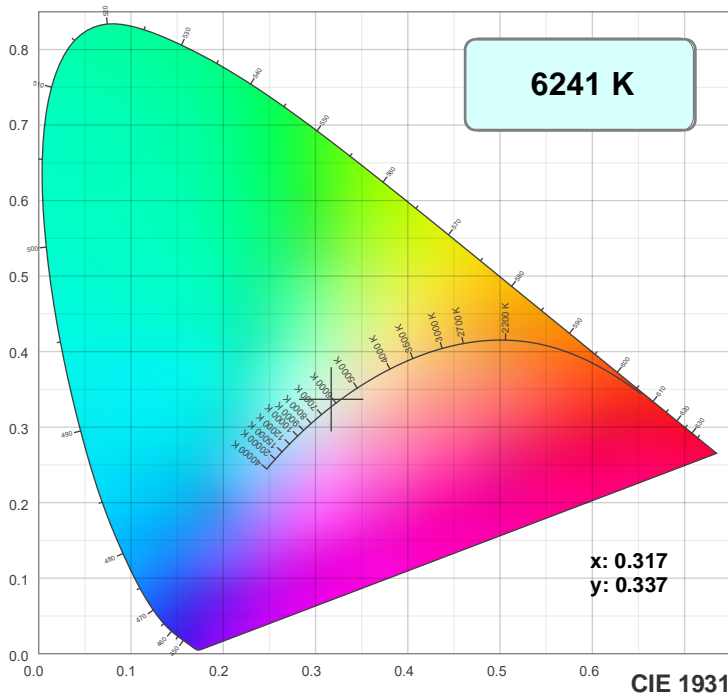

TM30: 91.1

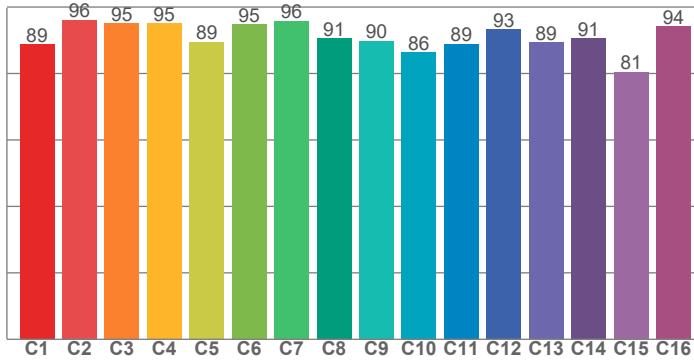

CRI: 94.9 (R1-R8)

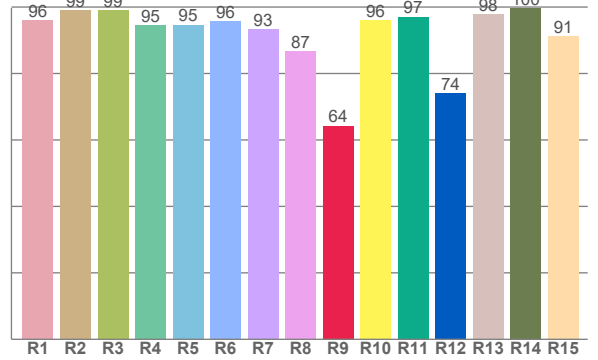

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96.0	98.9	99.0	94.6	94.7	95.8	93.4	86.6	64.3	96.0	97.1	74.0	97.9	99.6	91.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
88.8	96.2	95.1	95.1	89.4	94.8	95.8	90.6	89.9	86.4	88.8	93.3	89.3	90.6	80.5	94.1

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
87.8	97.2	91.8	89.9	92.7	94.3	97.1	97.0	98.6	98.5	98.9	98.6	97.4	89.2	89.3


CQS: 93.3

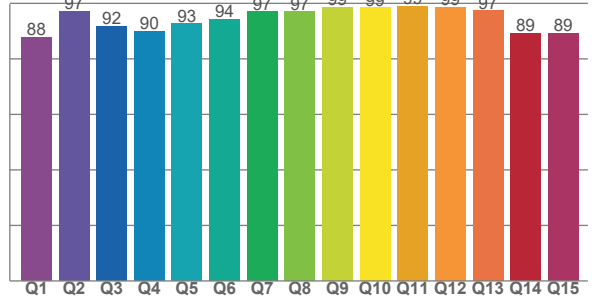

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
6241 K	94.9	64.3	91.1	97.2	93.3	0.317	0.337	0.198	0.315	0.0018

Beam Details

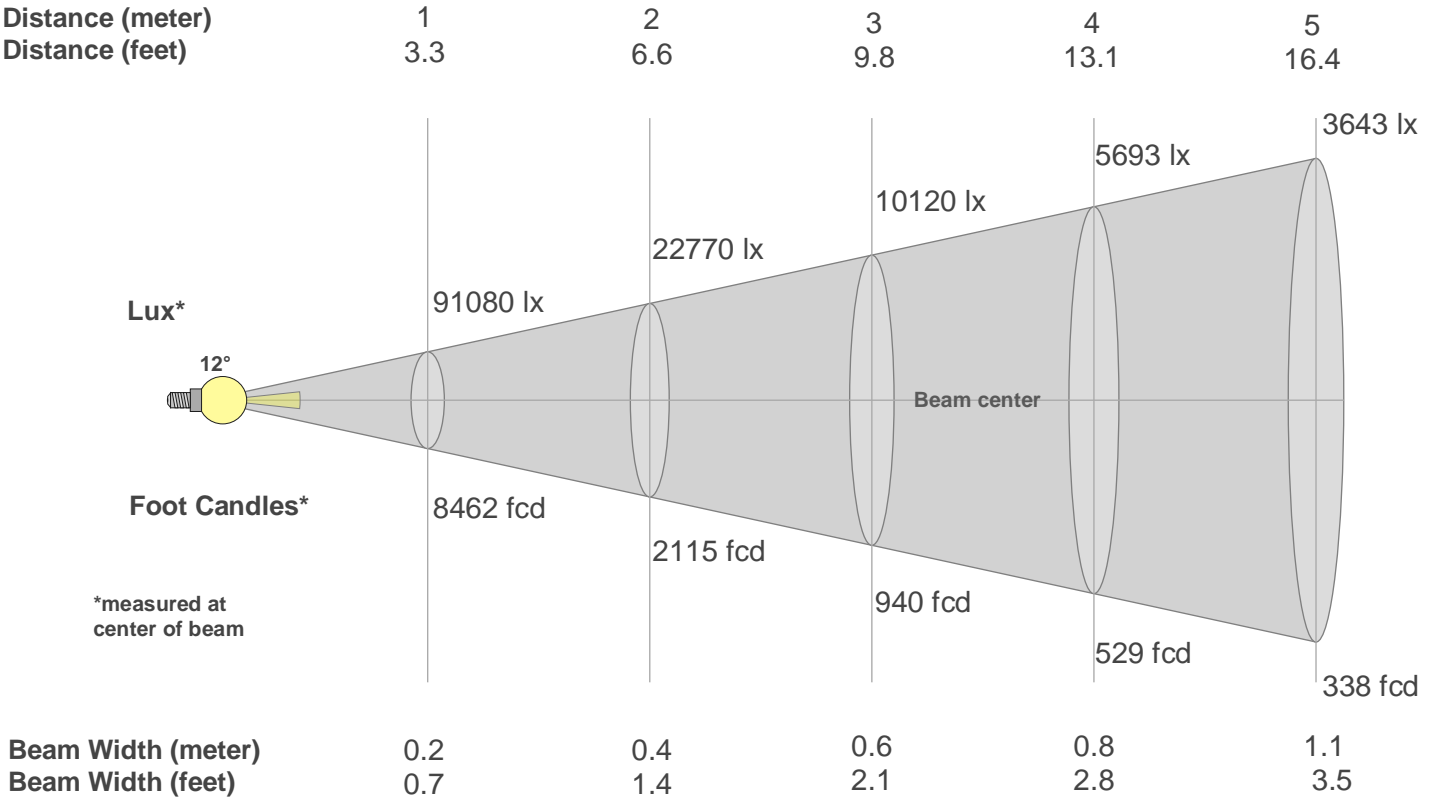

Beam Intensities from 1-20m																				
m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	91080	22770	10120	5693	3643	2530	1859	1423	1124	911	753	633	539	465	405	356	315	281	252	228
fcd	8461.6	2115.4	940.2	528.9	338.5	235	172.7	132.2	104.5	84.6	69.9	58.8	50.1	43.2	37.6	33.1	29.3	26.1	23.4	21.2

Intensities in 0° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
91.1K	89.1K	83.8K	75.7K	66.1K	55.9K	45.7K	36.3K	28.1K	21.2K	15.6K	11.2K	8.0K	5.7K	4.0K	2.8K	2.0K	1.5K	1.1K	0.9K
100%	98%	92%	83%	73%	61%	50%	40%	31%	23%	17%	12%	9%	6%	4%	3%	2%	2%	1%	1%

Intensities in 90° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
91.1K	89.1K	83.8K	75.7K	66.1K	55.9K	45.7K	36.3K	28.1K	21.2K	15.6K	11.2K	8.0K	5.7K	4.0K	2.8K	2.0K	1.5K	1.1K	0.9K
100%	98%	92%	83%	73%	61%	50%	40%	31%	23%	17%	12%	9%	6%	4%	3%	2%	2%	1%	1%

Intensities in 180° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
91.1K	89.4K	84.2K	76.4K	66.7K	56.3K	45.8K	36.1K	27.6K	20.5K	14.7K	10.4K	7.3K	5.0K	3.5K	2.4K	1.7K	1.3K	1.0K	0.7K
100%	98%	92%	84%	73%	62%	50%	40%	30%	22%	16%	11%	8%	6%	4%	3%	2%	1%	1%	1%

Intensities in 270° C-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
91.1K	89.4K	84.2K	76.4K	66.7K	56.3K	45.8K	36.1K	27.6K	20.5K	14.7K	10.4K	7.3K	5.0K	3.5K	2.4K	1.7K	1.3K	1.0K	0.7K
100%	98%	92%	84%	73%	62%	50%	40%	30%	22%	16%	11%	8%	6%	4%	3%	2%	1%	1%	1%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
12°	23°	30.8°	100.0%	100.0%