

UBL9H



Light Efficiency:

43 Lumen/Watt

Light Quality:

CRI: 90.6

Color Temperature:

2728 K

Output: 2035 lm

Peak: 17111 cd


Power: 47.2 W

PF: 0.6



Beam Angle

19.4°

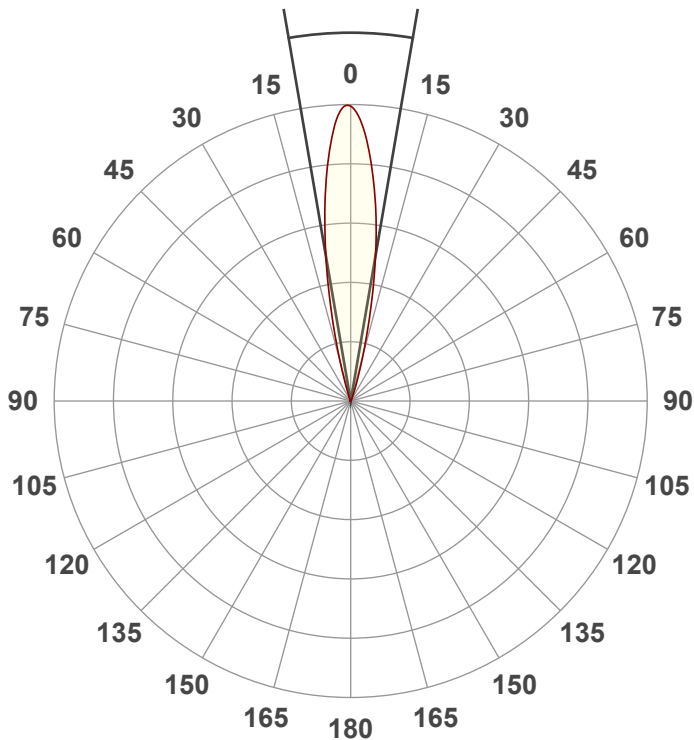

Test:

2700K

Date:

2/7/2024

Note:


@ 12




CIE 1931
x: 0.480
y: 0.450

Spectra



Dominant Wavelength: 581nm

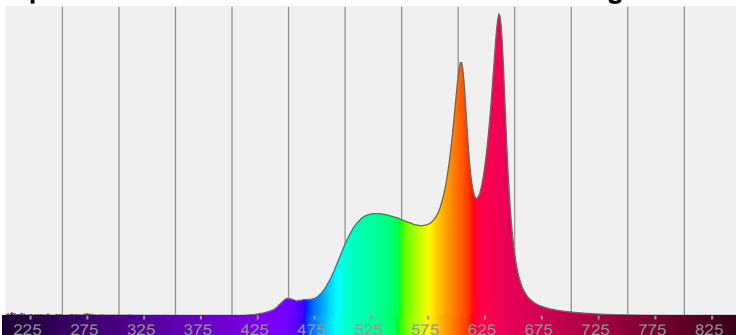


Power

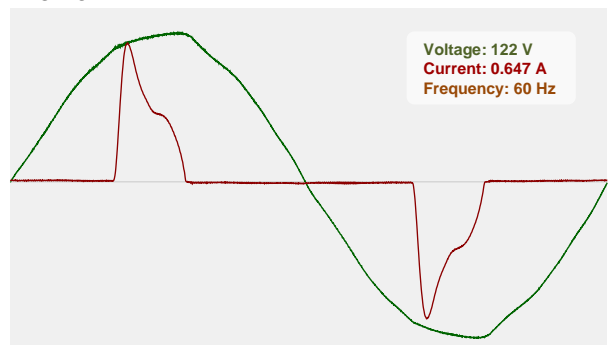


Color Details

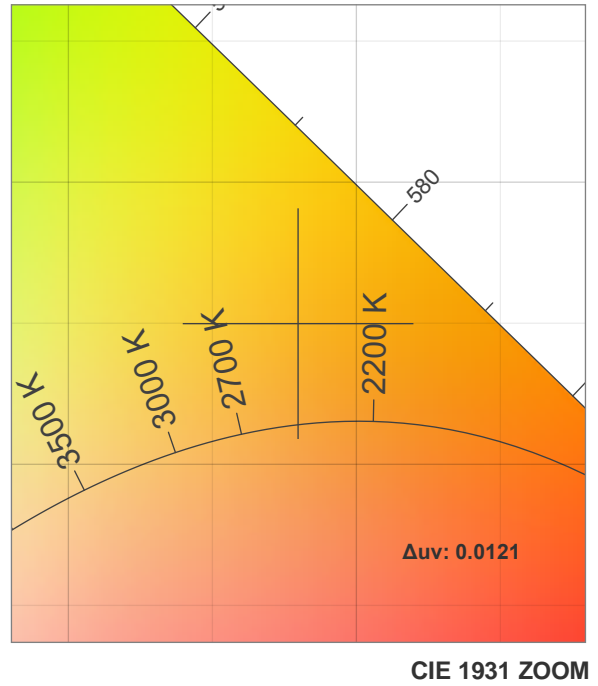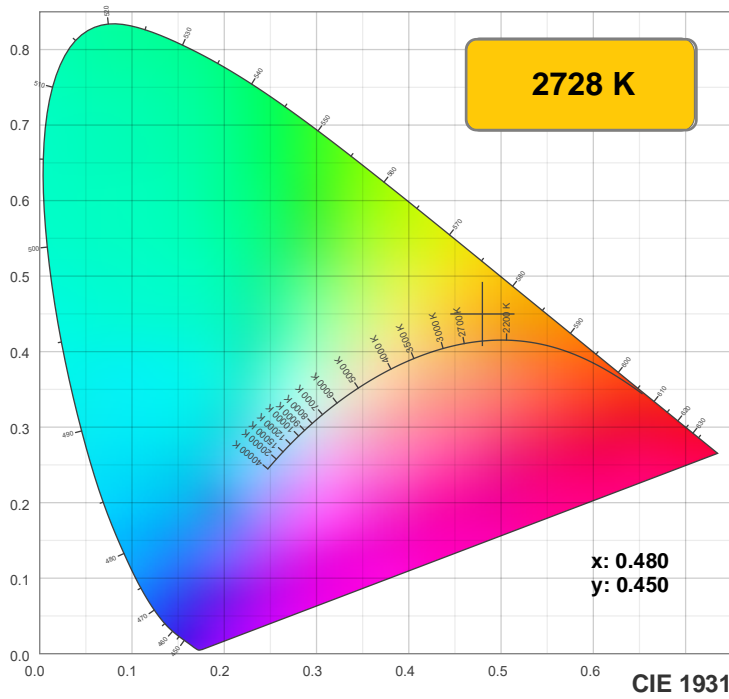

TM30: 79.2

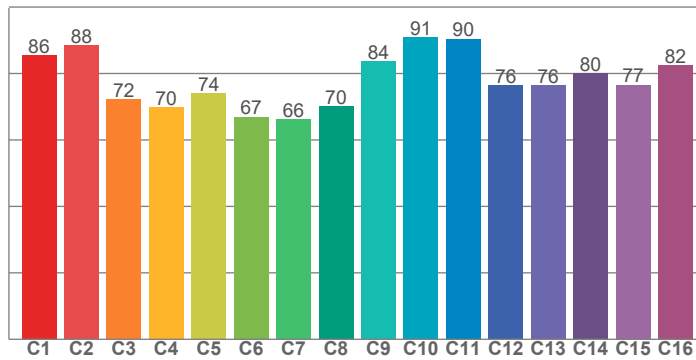

CRI: 90.6 (R1-R8)

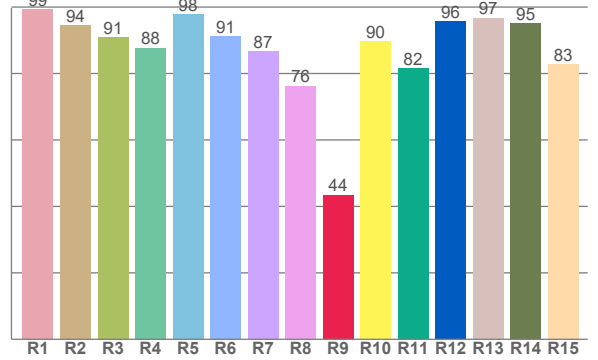

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
99.2	94.4	91.0	87.7	97.8	91.3	86.7	76.3	43.5	89.7	81.5	95.8	96.7	95.0	82.8


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
85.5	88.4	72.1	69.8	74.0	67.0	66.1	70.0	83.6	90.8	90.5	76.4	76.4	79.9	76.6	82.5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
74.1	72.4	77.5	82.9	93.4	86.0	65.0	50.4	46.7	33.4	48.4	59.9	75.2	77.6	82.8


CQS: 64.0

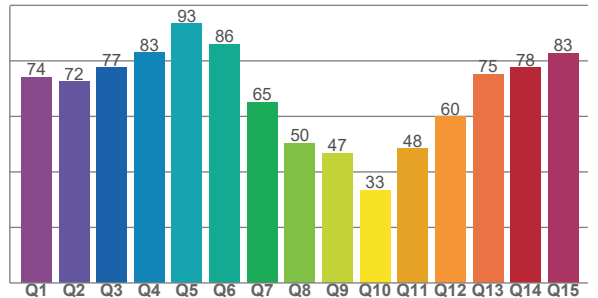

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2728 K	90.6	43.5	79.2	82.6	64.0	0.480	0.450	0.258	0.363	0.0121

Beam Details

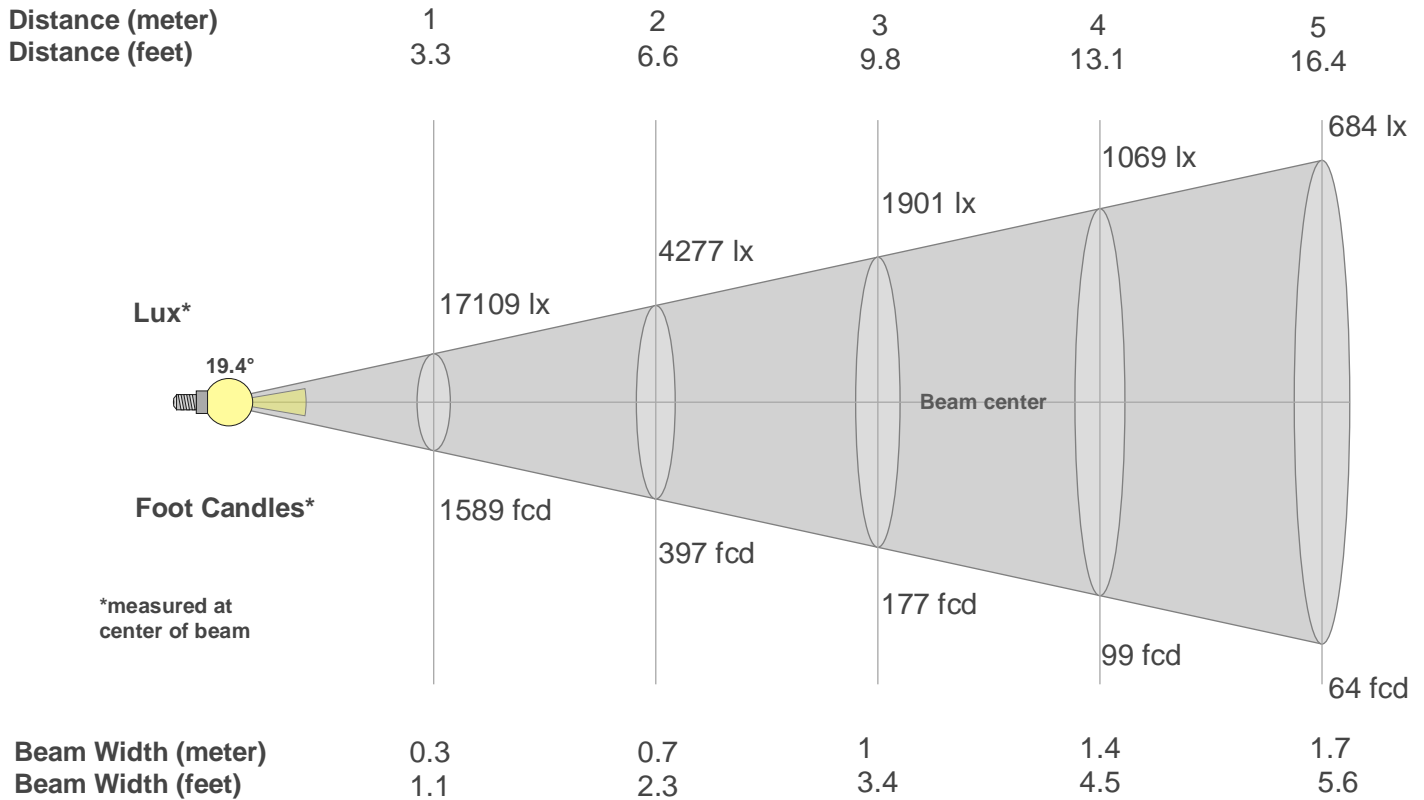

Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	17109	4277	1901	1069	684	475	349	267	211	171	141	119	101	87	76	67	59	53	47	43
fcd	1589.5	397.4	176.6	99.3	63.6	44.2	32.4	24.8	19.6	15.9	13.1	11	9.4	8.1	7.1	6.2	5.5	4.9	4.4	4

Intensities in 0° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
17.1K	17.1K	16.8K	16.3K	15.4K	14.4K	13.3K	12.1K	10.8K	9.5K	8.2K	6.9K	5.5K	4.4K	3.3K	2.4K	1.7K	1.1K	0.7K	0.5K
100%	100%	98%	95%	90%	84%	78%	71%	63%	55%	48%	40%	32%	26%	19%	14%	10%	7%	4%	3%

Intensities in 90° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
17.1K	17.1K	16.8K	16.3K	15.4K	14.4K	13.3K	12.1K	10.8K	9.5K	8.2K	6.9K	5.5K	4.4K	3.3K	2.4K	1.7K	1.1K	0.7K	0.5K
100%	100%	98%	95%	90%	84%	78%	71%	63%	55%	48%	40%	32%	26%	19%	14%	10%	7%	4%	3%

Intensities in 180° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
17.1K	16.8K	16.3K	15.6K	14.7K	13.8K	12.8K	11.7K	10.6K	9.4K	8.2K	7.0K	5.8K	4.7K	3.6K	2.8K	2.1K	1.5K	1.1K	0.8K
100%	98%	95%	91%	86%	80%	75%	68%	62%	55%	48%	41%	34%	27%	21%	16%	12%	9%	6%	5%

Intensities in 270° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
17.1K	16.8K	16.3K	15.6K	14.7K	13.8K	12.8K	11.7K	10.6K	9.4K	8.2K	7.0K	5.8K	4.7K	3.6K	2.8K	2.1K	1.5K	1.1K	0.8K
100%	98%	95%	91%	86%	80%	75%	68%	62%	55%	48%	41%	34%	27%	21%	16%	12%	9%	6%	5%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
19.4°	32.5°	40.8°	100.0%	100.0%