

Focus Spot 7Z




Light Efficiency:



Light Quality:



Color Temperature:





Output: 10704 lm
Peak: 1417446 cd
Power: 550 W
PF: 1.0



Beam Angle

5.6°

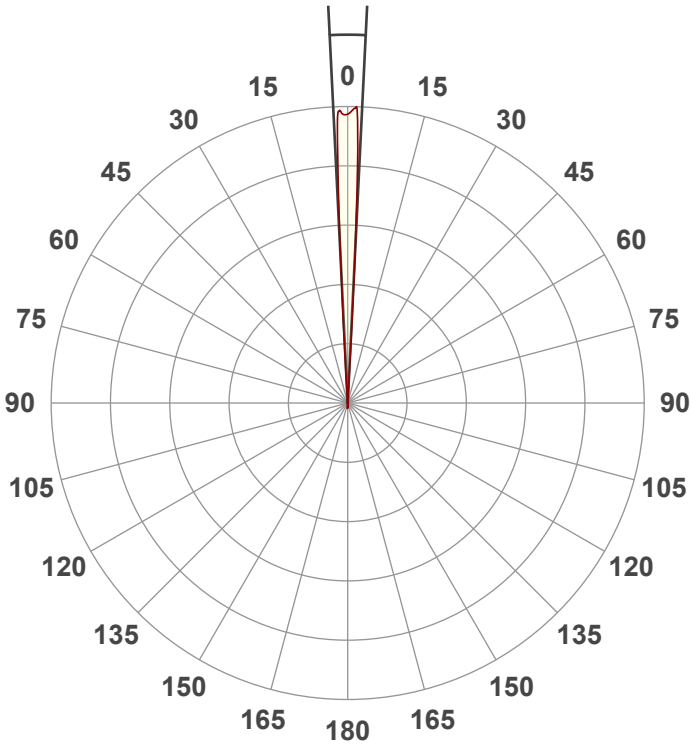


CIE 1931
x: 0.317
y: 0.330


Test:
Zoom In
Date:
8/1/2022
Note:

Spectra



Dominant Wavelength: 599nm

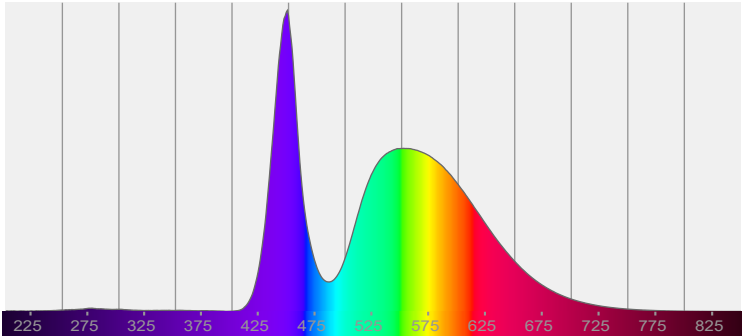


Power

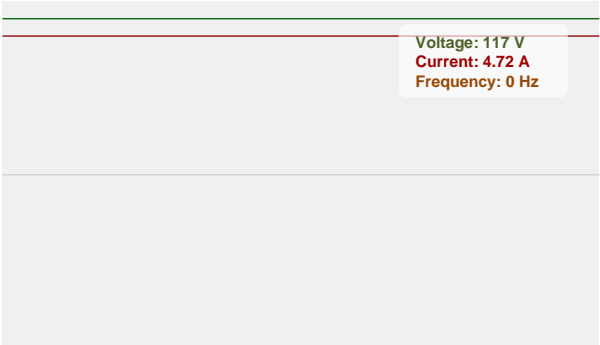


Color Details

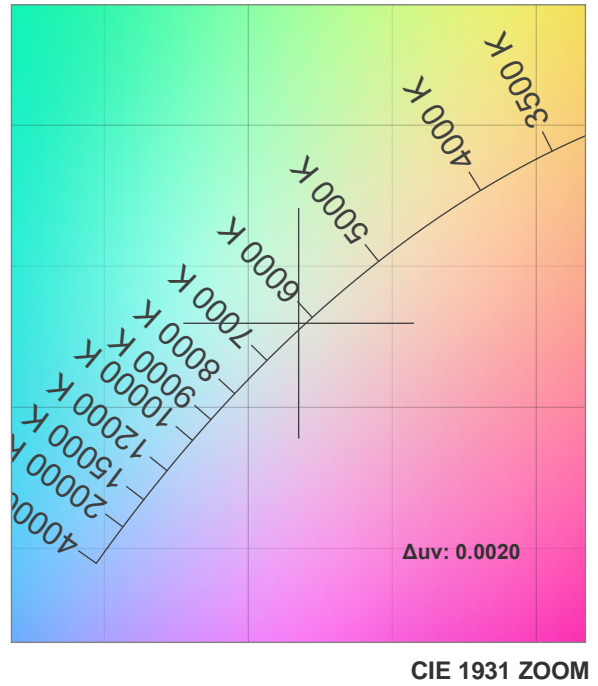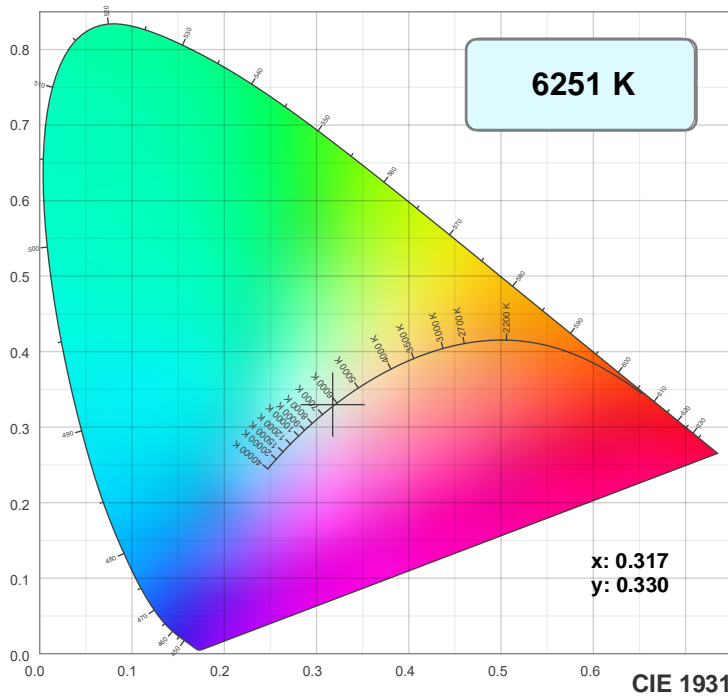

TM30: 70.9

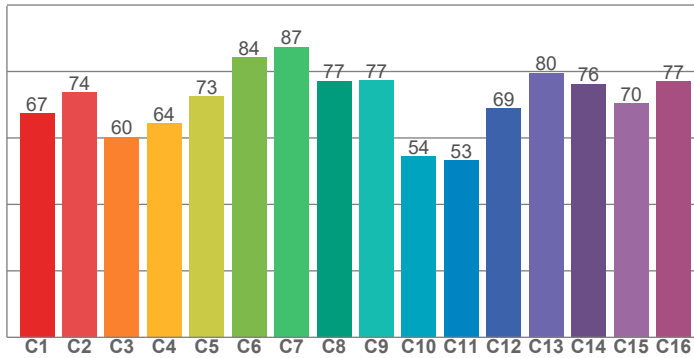

CRI: 70.9 (R1-R8)

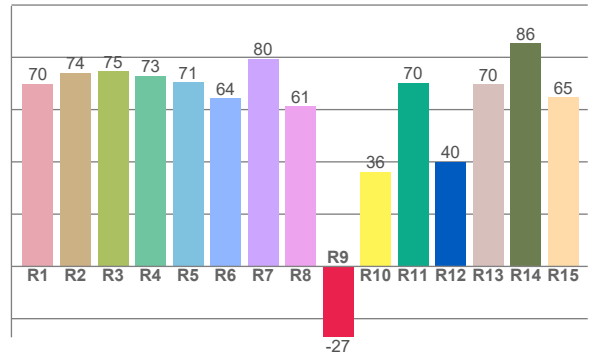

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
69.8	74.1	74.7	73.0	70.5	64.4	79.5	61.1	-27.1	36.2	70.2	40.1	69.8	85.5	64.8


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
67.3	73.6	60.3	64.3	72.5	84.3	87.4	77.2	77.3	54.4	53.2	68.9	79.5	76.2	70.4	77.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
80.2	91.5	59.0	52.8	65.5	70.5	75.6	85.7	86.9	68.5	62.5	64.9	68.7	57.7	67.1


CQS: 68.5

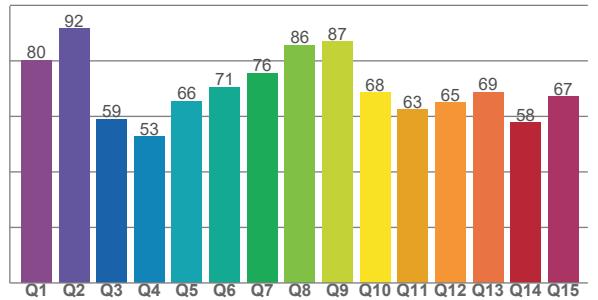

Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
6251 K	70.9	-27.1	70.9	94.3	68.5	0.317	0.330	0.201	0.313	0.0020

Beam Details

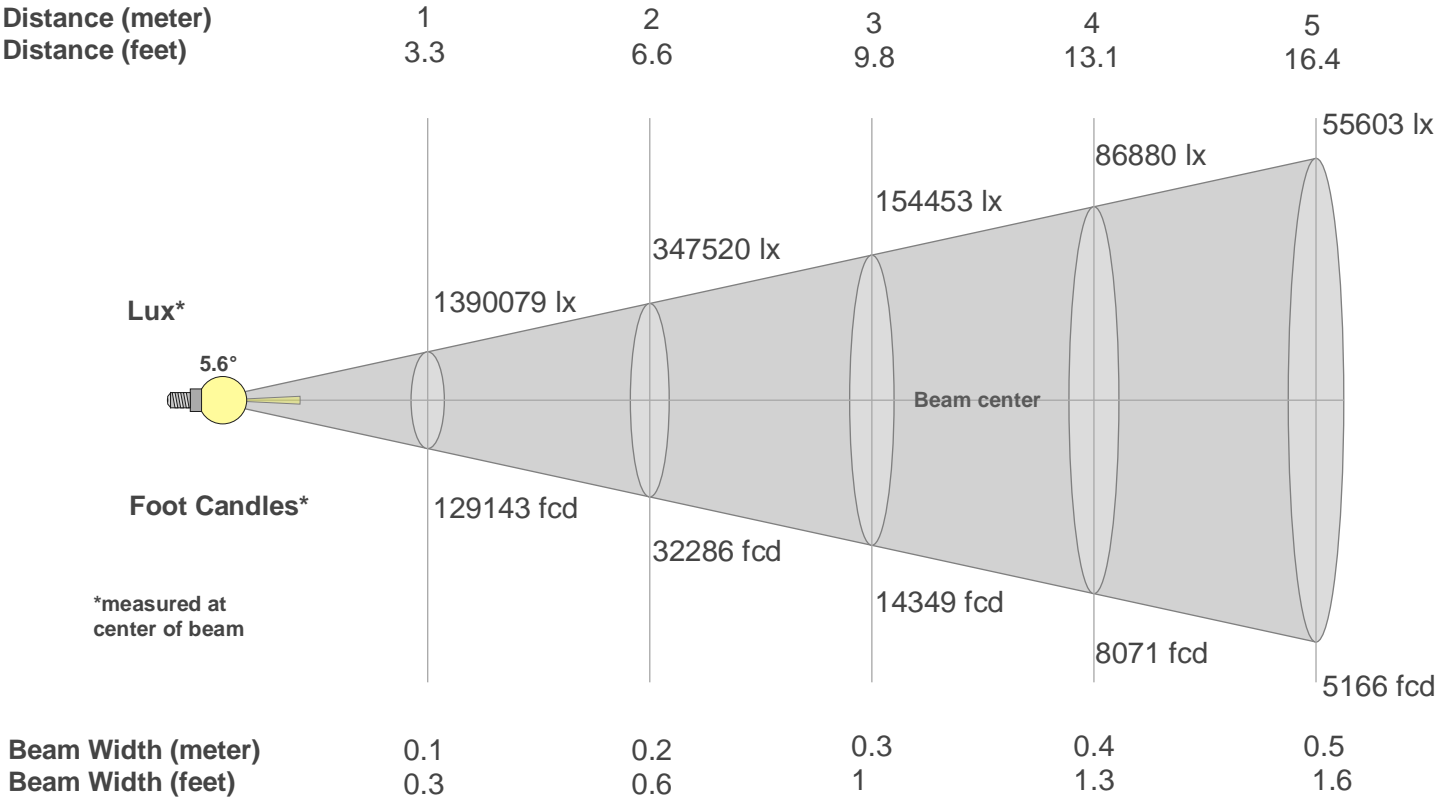

Beam Intensities from 1-20m																				
m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	1390079	347520	154453	86880	55603	38613	28369	21720	17161	13901	11488	9653	8225	7092	6178	5430	4810	4290	3851	3475
fcd	129142.6	32285.6	14349.2	8071.4	5165.7	3587.3	2635.6	2017.9	1594.4	1291.4	1067.3	896.8	764.2	658.9	574	504.5	446.9	398.6	357.7	322.9

Intensities in 0° C-plane																				
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	
1.4M	1.4M	1.4M	0.5M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	
100%	100%	98%	35%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	

Intensities in 90° C-plane																				
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	
1.4M	1.4M	1.4M	0.5M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	
100%	100%	98%	35%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	

Intensities in 180° C-plane																				
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	
1.4M	1.4M	1.3M	0.5M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	
100%	101%	97%	36%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	

Intensities in 270° C-plane																				
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	
1.4M	1.4M	1.3M	0.5M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	
100%	101%	97%	36%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
5.6°	6.7°	7°	100.0%	100.0%