

# Focus Spot 7Z



Light Efficiency:

21 Lumen/Watt

Light Quality:

CRI: 70.8

Color Temperature:

6247 K

Output: 11655 lm

Peak: 1397421 cd


Power: 549.9 W

PF: 1.0



Beam Angle

6°

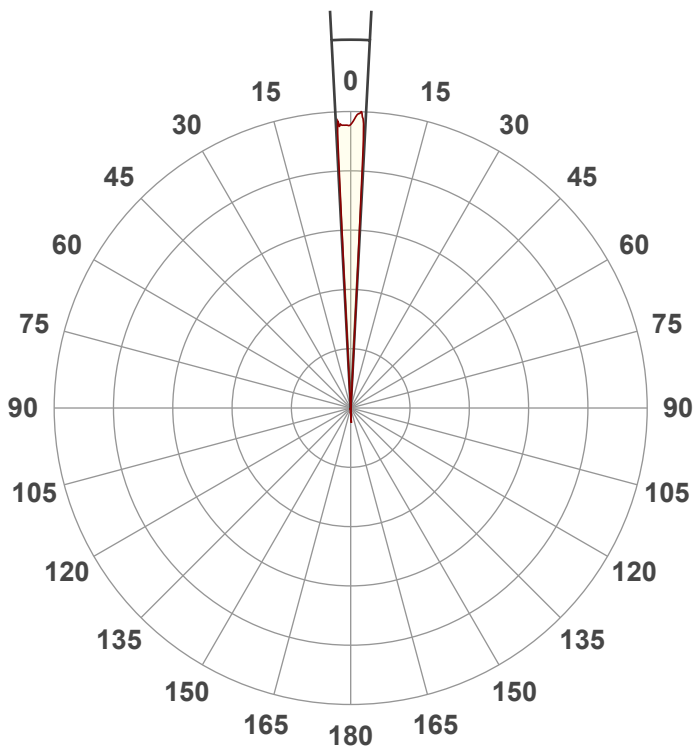

Test:

Zoom In

Date:


7/25/2022

Note:

CIE 1931  
x: 0.318  
y: 0.330

Spectra



Dominant Wavelength: 594nm

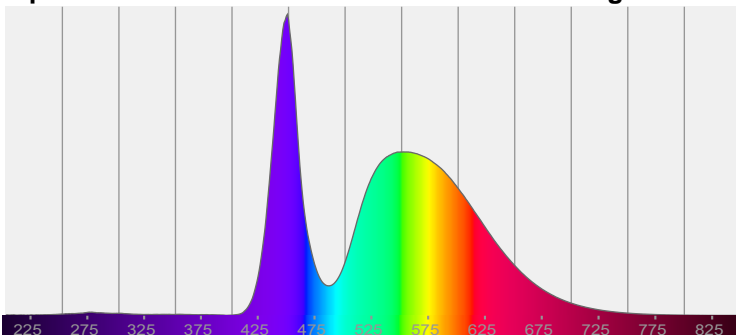


Power

Voltage: 117 V  
Current: 4.70 A  
Frequency: 0 Hz


## Color Details

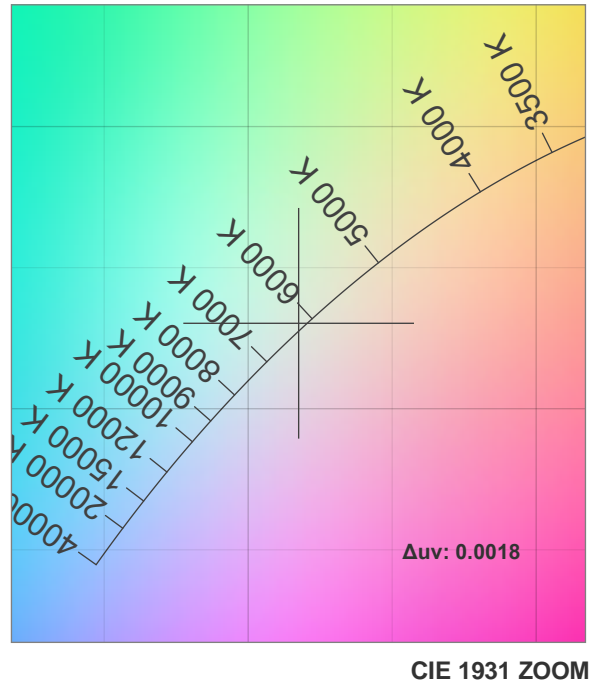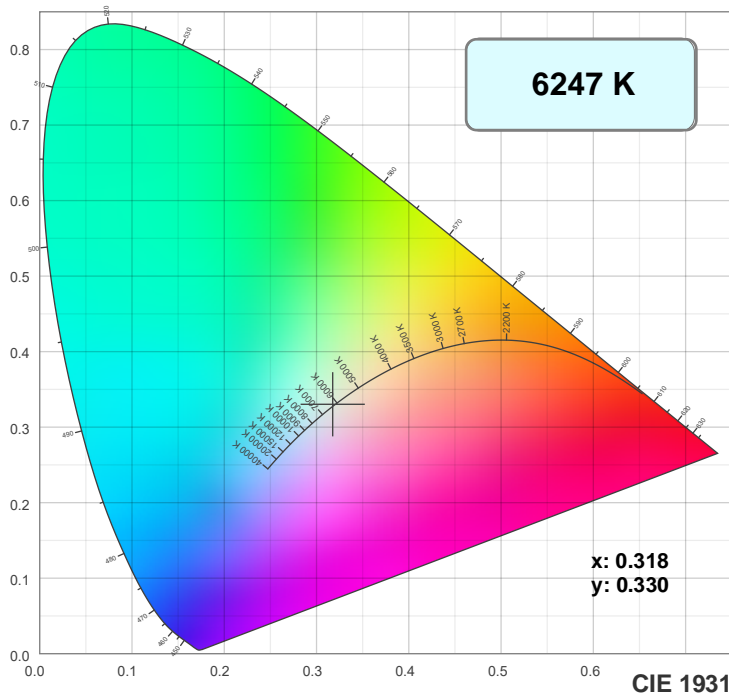

TM30: 70.9

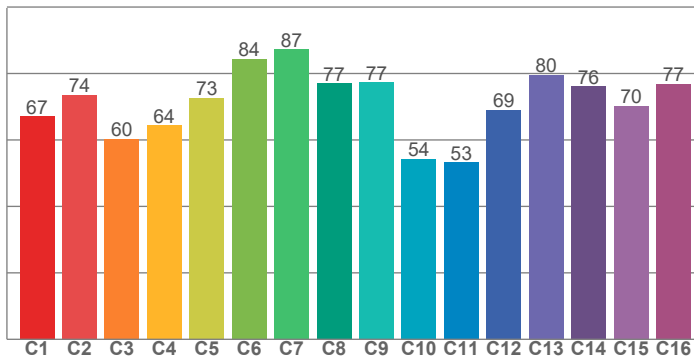

CRI: 70.8 (R1-R8)

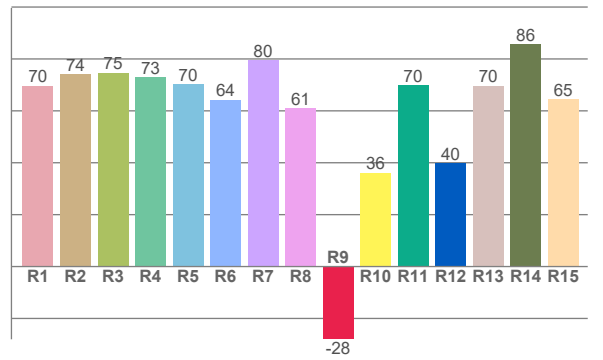

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
69.6	74.0	74.8	72.9	70.4	64.4	79.5	60.9	-28.0	36.1	70.0	39.9	69.7	85.6	64.5


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
67.1	73.6	60.3	64.4	72.6	84.4	87.3	77.0	77.2	54.3	53.2	69.1	79.6	76.2	70.3	76.9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
80.1	91.6	59.1	52.8	65.4	70.4	75.5	85.5	87.0	68.6	62.6	64.9	68.7	57.4	66.9


CQS: 68.4

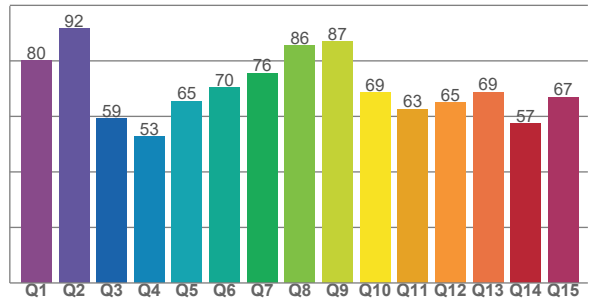

## Color Parameters

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
6247 K	70.8	-28.0	70.9	94.1	68.4	0.318	0.330	0.201	0.313	0.0018

## Beam Details

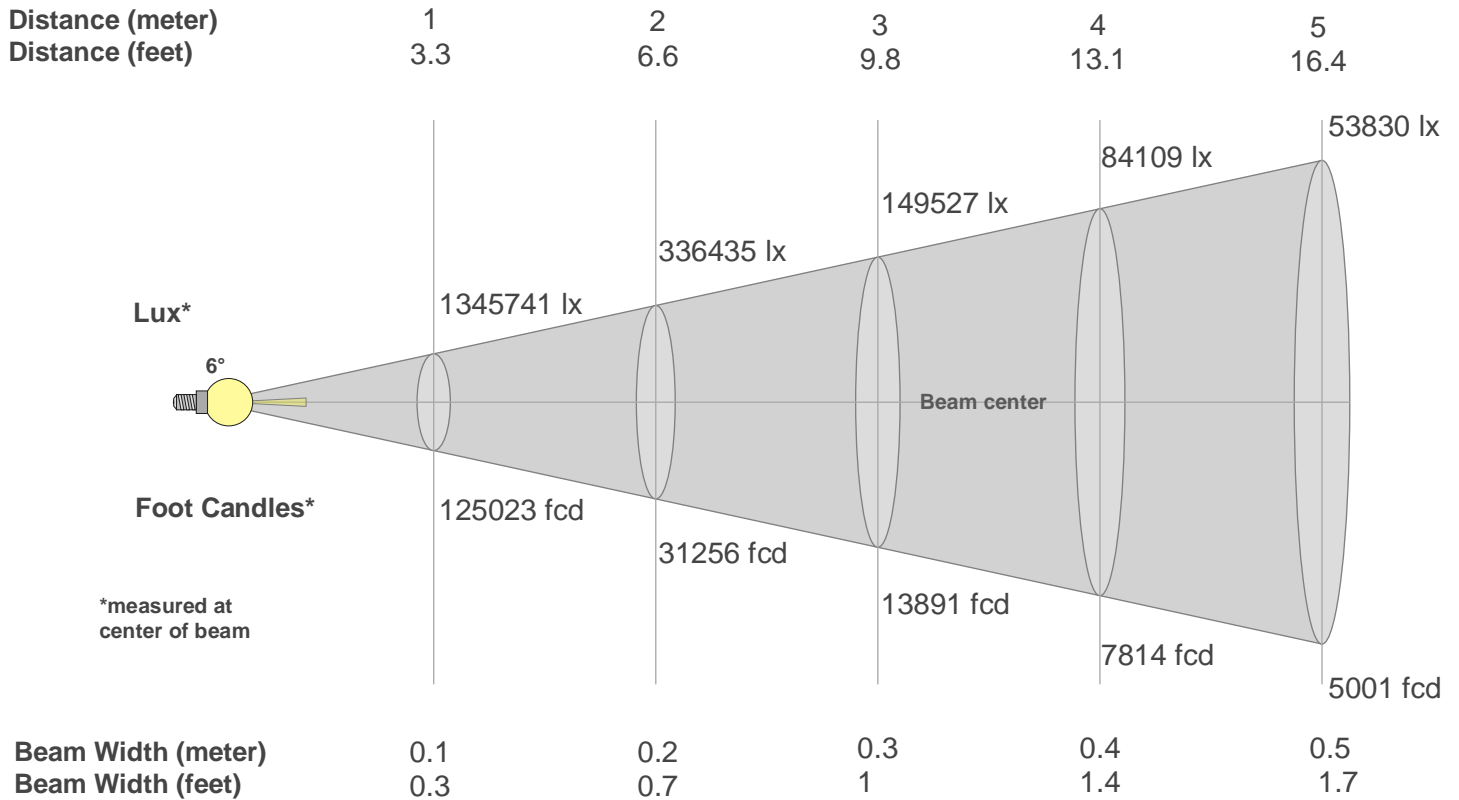

### Beam Intensities from 1-20m

m	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ft	3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6
lx	1345741	336435	149527	84109	53830	37382	27464	21027	16614	13457	11122	9345	7963	6866	5981	5257	4657	4154	3728	3364
fcd	125023.5	31255.9	13891.5	7814	5000.9	3472.9	2551.5	1953.5	1543.5	1250.2	1033.3	868.2	739.8	637.9	555.7	488.4	432.6	385.9	346.3	312.6

### Intensities in 0° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.3M	1.3M	1.3M	0.7M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	100%	100%	49%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

### Intensities in 90° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.3M	1.3M	1.3M	0.7M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	100%	100%	49%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

### Intensities in 180° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.3M	1.4M	1.4M	0.7M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	103%	104%	49%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

### Intensities in 270° C-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
1.3M	1.4M	1.4M	0.7M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M	0.0M
100%	103%	104%	49%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%

Beam Angle 50%	Field Angle 10%	Cutoff Angle 2,5%	Intensity Ratio in 120° Cone	Intensity Ratio in 90° Cone
6°	6.5°	7.1°	100.0%	100.0%