

Light efficiency:

5 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:

0 K

Output: 343 lm

Peak: 1435 cd

Power: 70.6 W

PF: 0.99



Tracking number: [n/a](#)

Product name:

ElectraPix Bar 16


Item number:

Blue

Date and time:

8/28/2024 12:35:07 PM

Description:

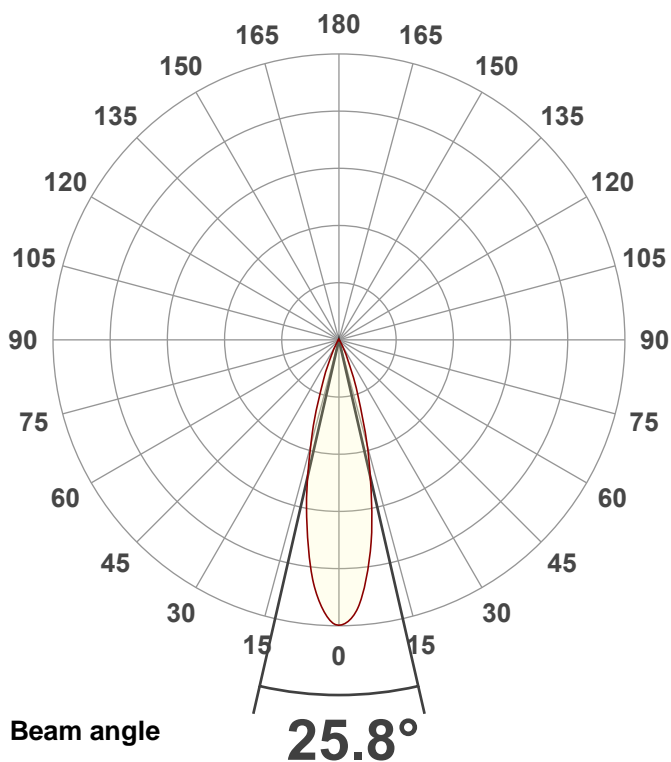


CIE 1931


x: 0.154



y: 0.025

Spectra

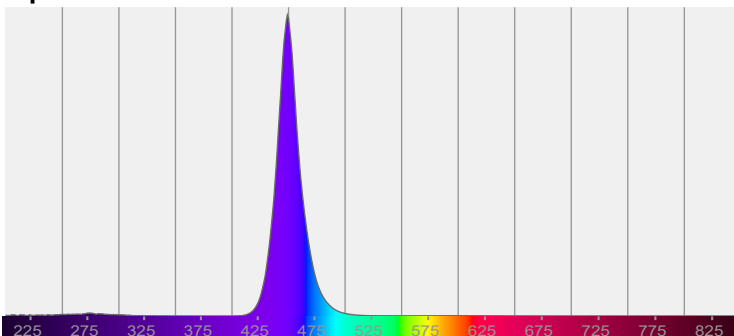

Power

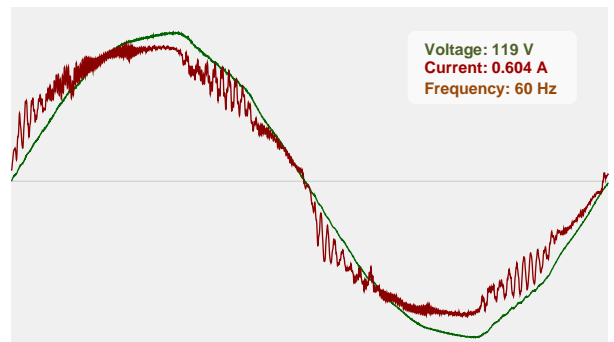

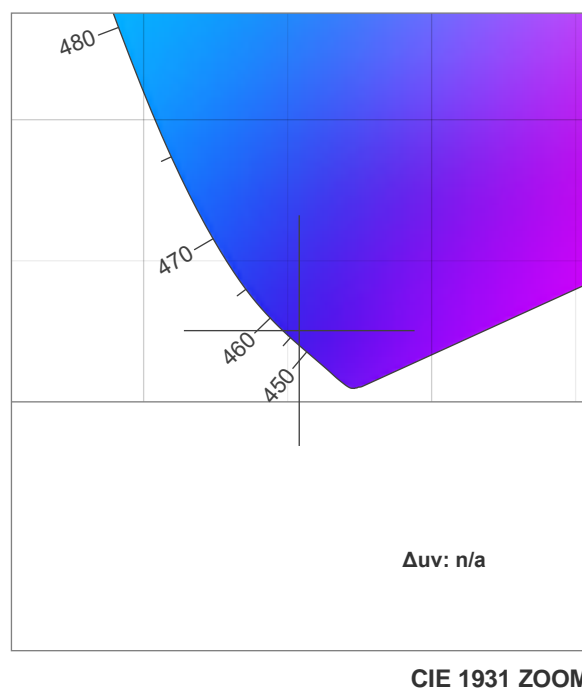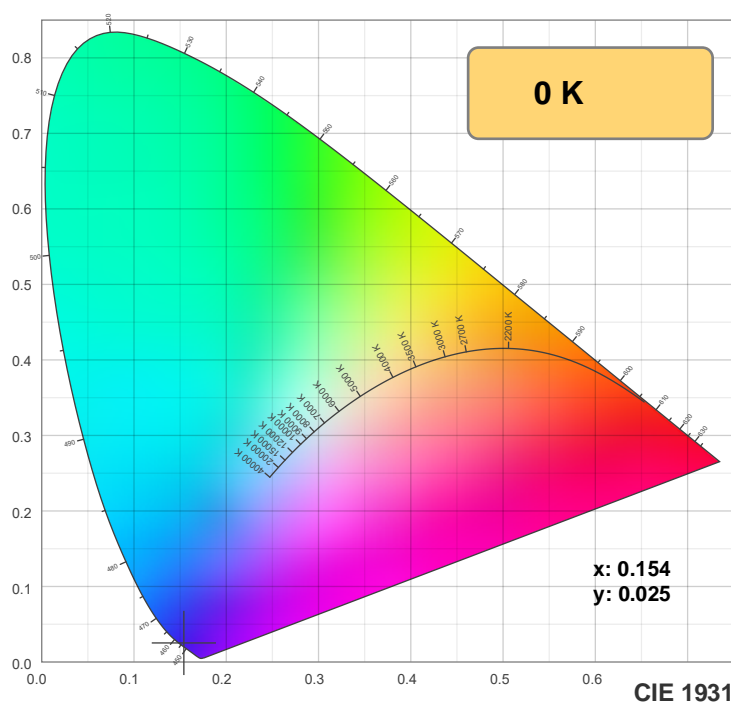

TM-30: 0.0

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16

CRI: 0.0 (R1-R8)

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.154	0.025	0.206	0.051	n/a

TM-30 details




Rf 0.0

Fidelity index Rf

Rg 0.0


Gamut index Rg

Hue Bin	R _t	Shifts (%)	
		Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

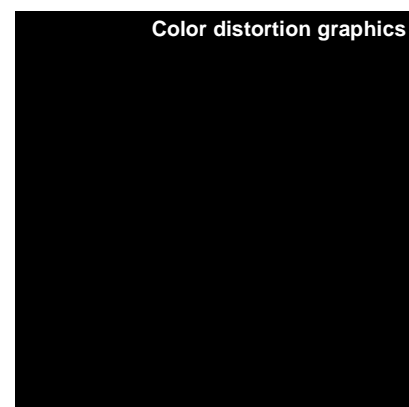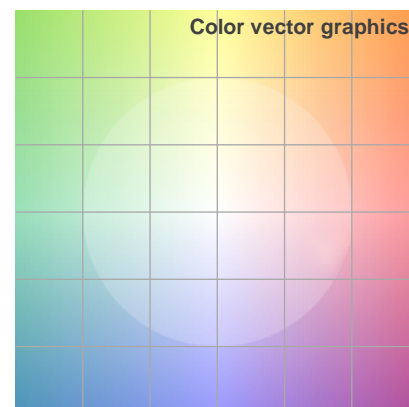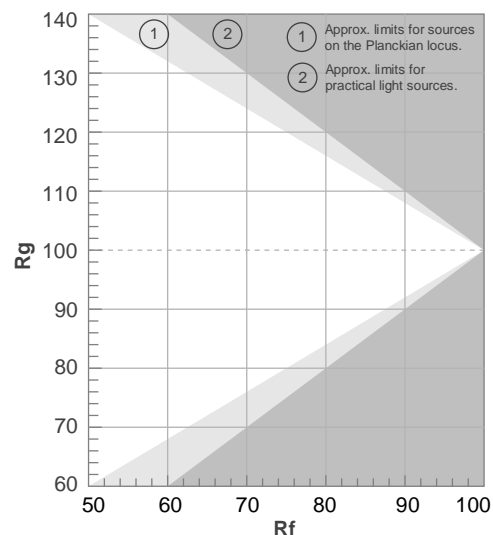

Color Evaluation Sample

Beam details

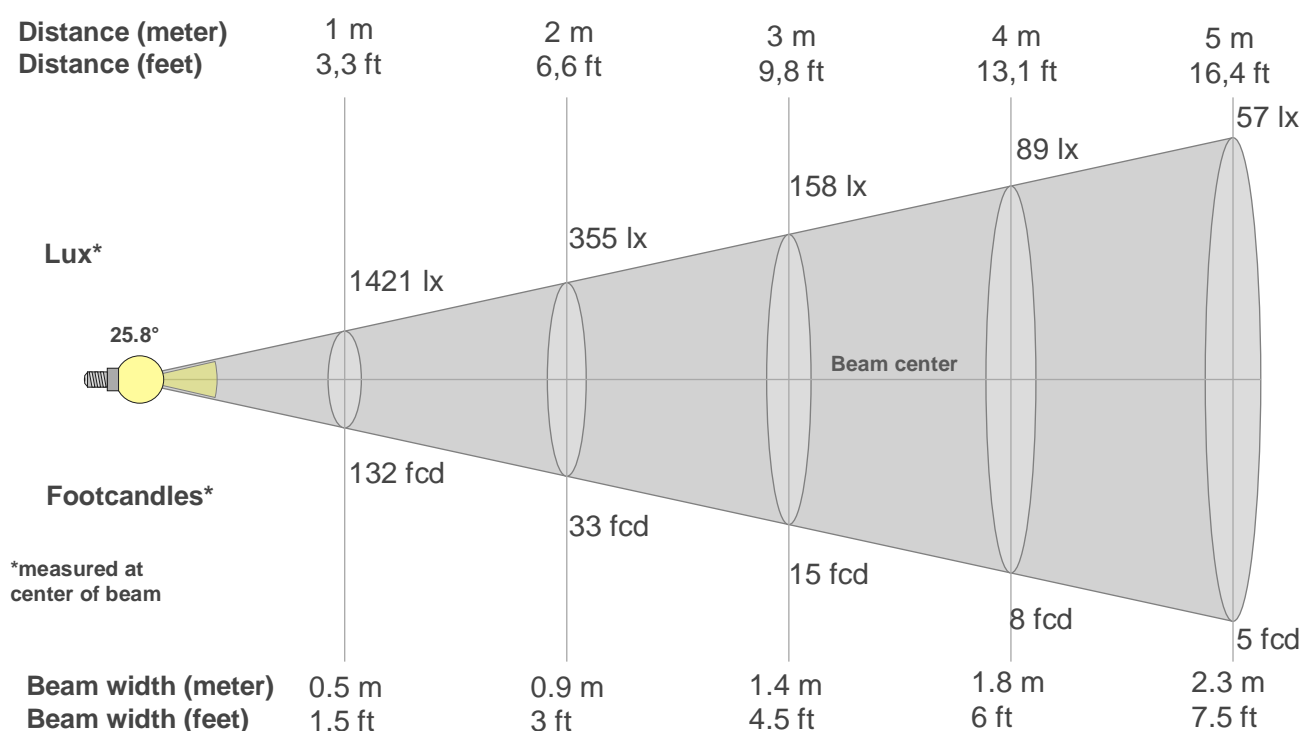

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1421lx	355lx	158lx	89lx	57lx	39lx	29lx	22lx	18lx	14lx	12lx	10lx	8lx	7lx	6lx	6lx	5lx	4lx	4lx	4lx
132fcd	33fcd	14.7fcd	8.2fcd	5.3fcd	3.7fcd	2.7fcd	2.1fcd	1.6fcd	1.3fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1421	1389	1358	1231	1102	956	791	627	493	359	254	181	109	80	53	35	26	17	14	11
100%	98%	96%	87%	78%	67%	56%	44%	35%	25%	18%	13%	8%	6%	4%	2%	2%	1%	1%	1%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1421	1389	1358	1231	1102	956	791	627	493	359	254	181	109	80	53	35	26	17	14	11
100%	98%	96%	87%	78%	67%	56%	44%	35%	25%	18%	13%	8%	6%	4%	2%	2%	1%	1%	1%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1421	1394	1314	1233	1083	934	784	636	488	380	273	194	140	86	66	46	32	26	19	17
100%	98%	93%	87%	76%	66%	55%	45%	34%	27%	19%	14%	10%	6%	5%	3%	2%	2%	1%	1%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1421	1394	1314	1233	1083	934	784	636	488	380	273	194	140	86	66	46	32	26	19	17
100%	98%	93%	87%	76%	66%	55%	45%	34%	27%	19%	14%	10%	6%	5%	3%	2%	2%	1%	1%


Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
25.8°	46.9°	60.7°	98.8%	96.4%

Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

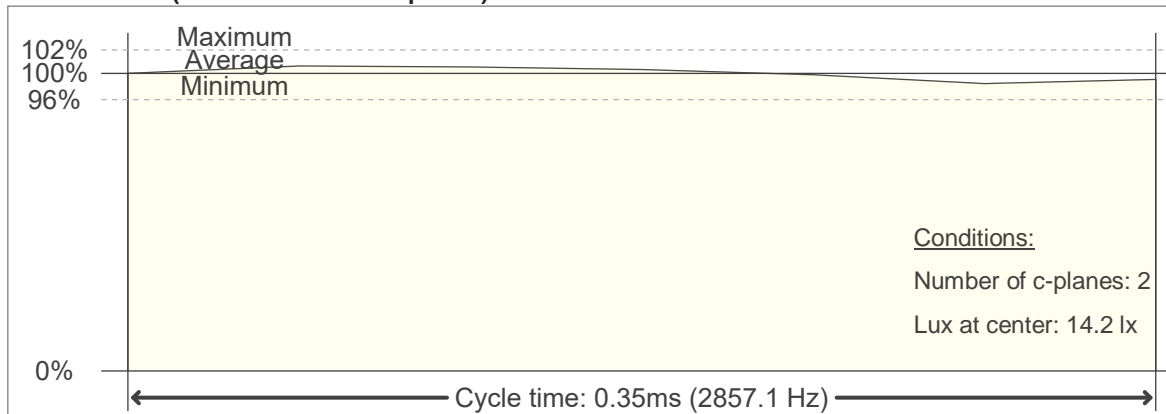

Flicker FFT (frequency scope of flicker curve)

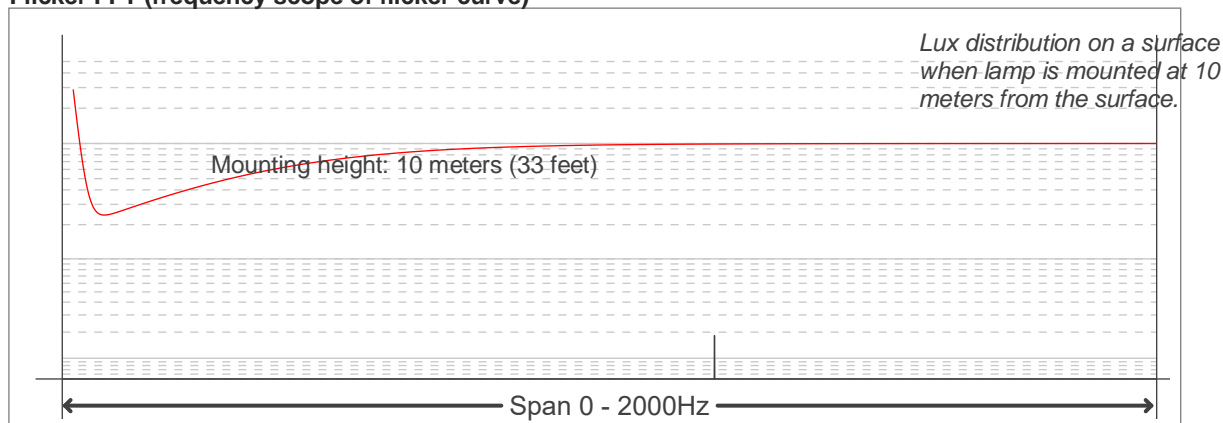

Flicker results:

Flicker frequency:		2857.14 Hz	
Flicker index:	0.01	JA8/10 40Hz	0.06 %
Flicker percentage:	9.16 %	JA8/10 90Hz	0.14 %
SVM: (Visual flicker)	0.04	JA8/10 200Hz	0.29 %
PstLM	0.02	JA8/10 400Hz	0.57 %
Mp	0.01	JA8/10 1000Hz	1.4 %

Flicker conditions:

Sample rate:	20000 samples/second
--------------	----------------------