



Light efficiency:


**34 Lumen/Watt**

Light quality:

**CRI: 0.0**

Color temperature:

**0 K**

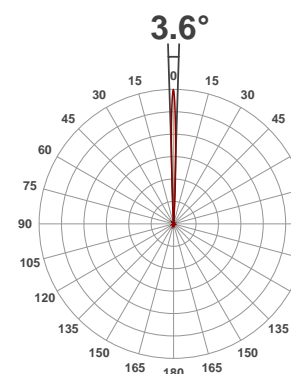

Product name:

**Saber Spot RGBW**

Test:


**Green**

Date:


**12/26/2017**

Output: 172 lm Power consumption: 5.1 W Peak: 27321 cd


Spectral distribution Dominant Wavelength: 523nm

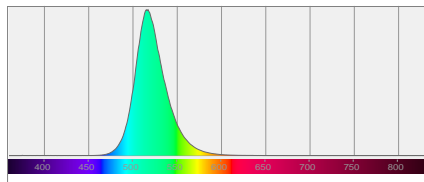


Color coordinates



Zoom color point




CRI R values

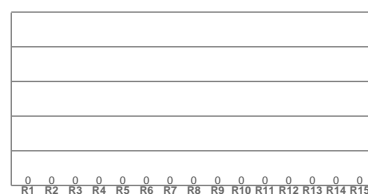

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color divition from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.150	0.716	0.053	0.380	n/a

## Beam details

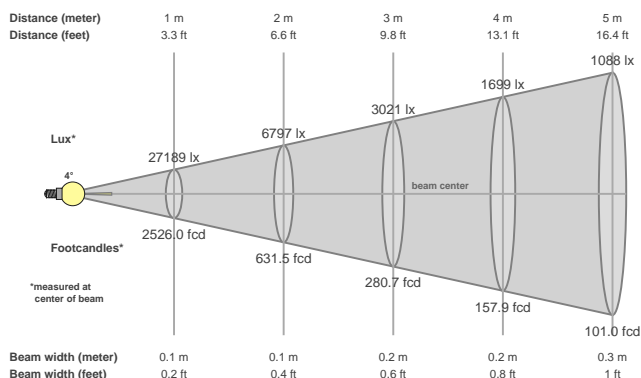

## Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
3.6°	6.5°	8.5°

## Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
27321 cd	88.4%	86.2%

## Power

Power	Power factor	Power frequency
5.1 W	0.53	60 Hz

Nominal voltage	Voltage	Current
230 V	115 V	0.083 A

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
27189lx	6797lx	3021lx	1699lx	1088lx	755lx	555lx	425lx	336lx	272lx	225lx	189lx	161lx	139lx	121lx	106lx	94lx	84lx	75lx	68lx
2526fcd	631.5fcd	280.7fcd	157.9fcd	101fcd	70.2fcd	51.6fcd	39.5fcd	31.2fcd	25.3fcd	20.9fcd	17.5fcd	14.9fcd	12.9fcd	11.2fcd	9.9fcd	8.7fcd	7.8fcd	7fcd	6.3fcd